



Stirrup bending machine

Focus 8 HS

Stirrup bending machine



MGP
the history of innovation



www.megroup.com



Focus 8 HS

A NEW GENERATION

The **FOCUS 8 HS** is the ideal solution in the field of automatic coil stirrup benders for its ease of use and high performance. **Flexibility, productivity** and product **quality** are always guaranteed.



3 WIRES: FLEXIBILITY AND PRODUCTIVITY

Small or large **stirrups**, **straightened** or **bent bars**, as well as **circles** and **spirals** are fabricated thanks to a complete array of accessories, able to satisfy the widest range of productive requirements. The **simultaneous use of three wires** ensures unrivalled productivity.





QUALITY AND PRODUCTIVITY

The **FOCUS 8 HS** is a user friendly automatic stirrup bender that provides superior quality of finished products. The combined action of an exclusive series of patented devices minimizes the time for setup adjustments and reduces drastically the amount of discarded products. A drive and control system, based on the latest generation technology, grants to reach unparalleled levels of productivity per hour.



The twisting of the wire during the pulling phase creates open stirrups.



patented

AN INNOVATIVE SOLUTION

The **AFS** is a straightening system that eliminates the effect of the wire rotation on its own axis. Therefore, closed stirrups and straight bars can always be produced. The independent control of the traction on the three wires, as well as the increased surface of contact with the large infeed wheel, eliminates any difference in length between the three wires.

Thanks to this design and to the consequent lower pressure applied on the steel material, the coil ribs are far less deformed by the straightening process.

The lifetime of the infeed roller themselves is about 8 times longer than in case of traditional straightening methods.

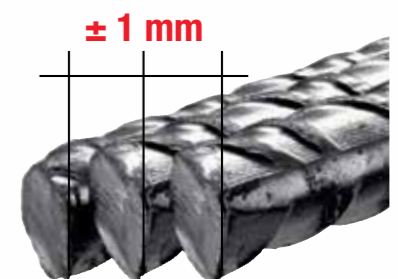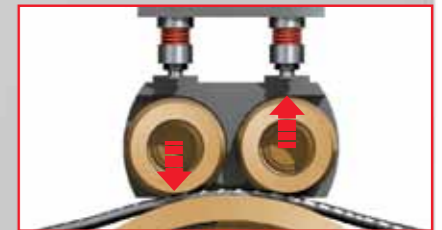

CONTROLLED STRAIGHTENING

The combined action between the **AFS** System and the dynamic visualization of rollers' position allows a simple working of three wires simultaneously.



SAFETY AND ERGONOMICS



With the **AFS** system it is **always** granted to obtain **closed stirrups**, thus **eliminating** the typical and dangerous **manual operation** during the bending process by operator. It is possible to produce straight bars or bent at one end, in total security.

WORLD SYSTEM: TOTAL CONTROL



- **MEP Industrial PC "World System" operator control panel is comprised of:**
 - LCD screen for the user friendly visualization of all data.
 - Compact, "embedded" microprocessor with low power consumption.
 - Input /Output and Control Axes electronic card with protection against short circuit and overload.
- **The custom software developed by MEP allows:**
 - Data input with graphic visualization of programmed and pre-memorized shapes.
 - Saving of 500 positions in memory.
 - Control of all speed parameters in execution via a potentiometer.
 - Saving and archiving of data relative to work cycles and generation of daily production statistics (diameters processed, and daily fabricated weights by diameter).
 - "Active diagnostic" system for a constant efficiency check of all machine devices.
 - Interface compatible with optical bar code reader through RS 232 port.
 - Automatic operating speed reduction based upon the diameter of the stirrup.



QUALITY DECOILING



- **Decoilers** equipped with an automatic braking system monitored by the control panel according to the work cycle.



- **Spacer** for the use of spooled or rewind coils. (OPTIONAL)

ACCESSORIES




- **Supporting and collecting unit** for the production of straight bars and bars bent at one end. (OPTIONAL)



- **Bender supplied with central bending tools in compliance to the international standards.**
Exclusive MEP design, designed to facilitate the overlapping and the guiding of the external wire with respect to the internal one during the bending phase. This means that complex or even very small stirrup can be realized with three wires simultaneously.

TECHNICAL AND PRODUCTION CHARACTERISTICS

			
	SINGLE STRAND PROCESSING WIRE DIAMETER		
	cold drawn, hot rolled, smooth or ribbed wire	from Ø 4 to Ø 8 mm	from #2 to #2
$f_y = 600 \text{ N/mm}^2 - f_t = 700 \text{ N/mm}^2$ (other loads upon request)			
	DOUBLE STRAND PROCESSING WIRE DIAMETER		
	cold drawn, hot rolled, smooth or ribbed wire	from Ø 4 to Ø 8 mm	from #2 to #2
$f_y = 600 \text{ N/mm}^2 - f_t = 700 \text{ N/mm}^2$ (other loads upon request)			
	TRIPLE STRAND PROCESSING WIRE DIAMETER		
	cold drawn, hot rolled, smooth or ribbed wire	from Ø 4 to Ø 6,3 mm	from #2 to #2
$f_y = 600 \text{ N/mm}^2 - f_t = 700 \text{ N/mm}^2$ (other loads upon request)			
	SQUARE STIRRUP DIMENSIONS		
	minimum with Ø 4 mm wire (optional bending pin)	50 mm x 50 mm	2" x 2"
	maximum if clockwise	1300 mm x 1300 mm	4-3" x 4-3"
	maximum if counterclockwise (with eventual optional cover extension)	2000 mm x 2000 mm	6-7" x 6-7"
	LENGTH OF STRAIGHTENED AND CUT-TO-LENGTH BAR		
	minimum	5 mm	3/16"
maximum (if equipped with optional supporting guide; other sizes upon request)	12000 mm	39-4"	
	CENTRE FORMING TOOLS DIAMETER		
	minimum	12 mm	1/2"
maximum (other sizes upon request)	32 mm	2"	
	MAXIMUM DISTANCE BETWEEN CENTRAL BENDING PIN AND THE GROUND		
	standard	1300 mm	4-3"
optional upon request	> 1300 mm	> 4-3"	
	OPERATING TEMPERATURE		
	standard	-5° C / +40° C	23° F / 104° F
optional upon request	-15° C / +55° C	5° F / 131° F	
	INSTALLED POWER		
	maximum (other sizes upon request)	18 kW	24 hp

THE PLANT DOES NOT REQUIRE COMPRESSED AIR.

f_y : max. unit yield point - f_t : max. tensile strength

Note: #2 = 1/4" ; #3 = 3/8" ; #4 = 1/2"

MEP

MEP Macchine Elettroniche Piegatrici
via Leonardo Da Vinci, 20
I - 33010 Reana del Roiale (UD) - ITALY
Tel. +39 0432 851455
Fax +39 0432 880140

**MEP
BRASIL**

MEP Brasil
Rua Bom Jesus da Cachoeira, nº 100
Parque Edu Chaves
CEP 02236-020 - Sao Paulo - BRASIL
Tel. +55 11 2240.4610 - 2240.4553
Fax +55 11 2240.4610 - 2240.4553

**MEP
FRANCE**

MEP France S.A.
8 bis, rue des Oziers
BP 40796 Zone d'Activités du Vert Galant
95004 St. Ouen L'Aumône FRANCE
Tel. +33 1 34300676
Fax +33 1 34300672

**MEP
NORD-EUROPE**

MEP Nord-Europe GmbH
Brienner Strasse 55
D-80333 München GERMANY
Tel. +49 089 41610829

**MEP
POLSKA**

MEP Polska Sp. z o.o.
ul. Józefowska 13/A
93-338 Łódź POLAND
Tel. +48 42 645 7225
Fax +48 42 645 7058

**MEP
VOSTOK**

MEP Vostok OOO
Ул.Новаторов, 36 корп.3 Офис XXIV
119421 Москва Россия
Tel./Fax: +7 495 745 04 90

www.mepgroup.com
sales@mepgroup.com