

MA Gun Coating Series


Adjustable Coating Lengths up to 800 mm

Designed for Ultimate Precision

MELTON's MA Coating Gun Series are designed for continuous applications with maximum precision width adjustment to reduce adhesive usage. The MA Coating Series offers improved reliability; engineered to meet the demanding needs of the woodworking environment.

MELTON's MA Series Features

- A special design to ensure a consistent and smooth application for exact adhesive - film coating.
- Easy coating width adjustment up to 800 mm.
- RTD sensing and proportional temperature control for a tolerant gun temperature error margin up to 0.5 ° C (1° F).
- A reliable steel frame and optional Teflon® coating to prevent build-up for an easy-to-clean surface.
- Maximum durability for minimized labor and maintenance costs.



Valve system supply high and consistent coating quality due to an accurate process control .



Changeable connection's situation provide versatility and flexibility to the application depending on the customer needs.



Easy and precise coating width, side or centered, hand adjustment. Regulation crank position available at right or left.




Possibility of roller bracket and position guide. Lip pressure control designed for fragil material works.



Optional filter.

Suitable for work with special adhesives

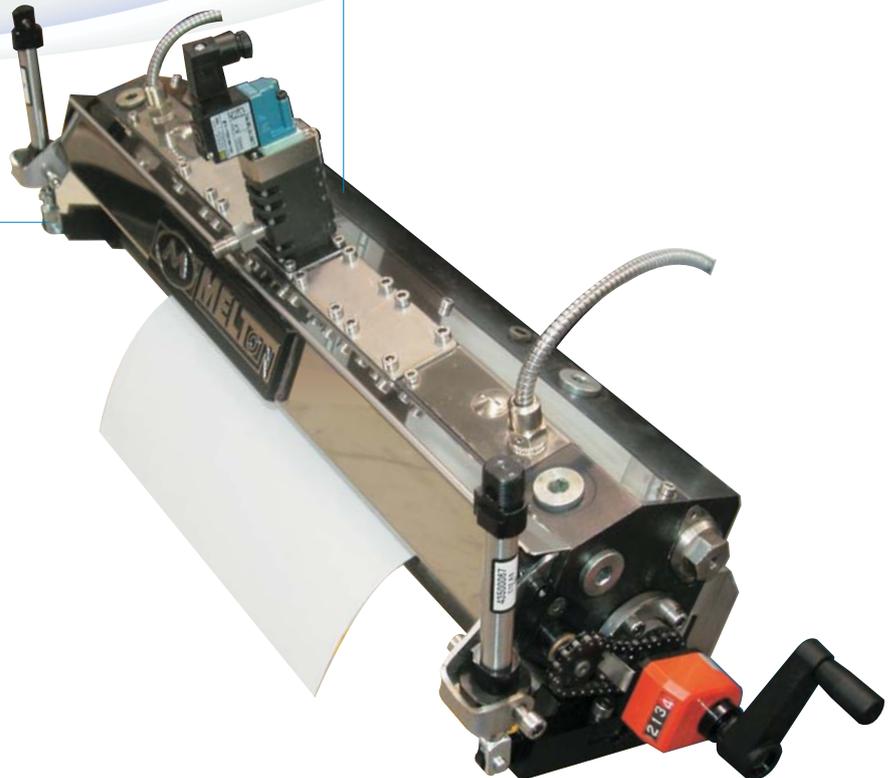

MA Coating Guns Series



APPLICATIONS Melton MA Coating Guns are specially conceived for wood profile applications. Thanks to his extreme adjustment precision provides the customer with a superior quality application and perfect results.



A TOTAL PACKAGE

Melton offers a complete selection of hot-system components and support equipment:

RTD hot - melt hoses

Manual and automatic dispensing valves

Nozzle and applicator styles

Mounting bracket packages

Solid-state pattern control systems

In-line filters

Replacement parts for competitive systems

Technical Specifications

MA Coating Guns Characteristics

Maximum Coating Length	Up to 800 mm
Temperature Control	PT - 100/ NI - 120/ FEKO
Coating Thickness Range	0.3mm - 1.5mm
Maximum Operating Temperature	230°/446 F
Maximum Operating Pressure	50 bar
Operating Speed	150 m/min
Dimensions	190 mm x 147mm x (depending on the configuration)



MELTON S.L.U. • Pol. Ind. Agustinos, calle G, Nº 34 • 31160 Orcoyen • NAVARRA • ESPAÑA
Tel.: +34 948 321 580 • Fax: +34 948 326 584 • e-mail: melton@melton.es • www.meltonhotmelt.com



