

Engine powered forklift 2.0 - 3.5 ton

TONERO^{HST}



Engine powered forklift 2.0 - 2.5 ton

Truck specifications					06-8FG20F	06-8FD20F	06-8FG25F	06-8FD25F
Identification	1.1	Manufacturer			TOYOTA	TOYOTA	TOYOTA	TOYOTA
	1.2	Model			06-8FG20F	06-8FD20F	06-8FG25F	06-8FD25F
	1.3	Drive			LPG	Diesel	LPG	Diesel
	1.4	Operator type			driver seated	driver seated	driver seated	driver seated
	1.5	Load capacity/rated load	Q	kg	2000	2000	2500	2500
	1.6	Load centre	c	mm	500	500	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	470	470	470	470
	1.9	Wheelbase	y	mm	1650	1650	1650	1650
Weight	2.1	Service weight		kg	3250	3290	3560	3600
	2.2	Axle load, with load, front/rear		kg	4580/670	4600/690	5280/780	5300/830
	2.3	Axle load, without load, front/rear		kg	1410/1840	1430/1860	1300/2260	1320/2280
Tyres	3.1	Tyre - pneumatic (P), pneumatic shaped cushion (SE), solid rubber (R)			SE-PN	SE-PN	SE-PN	SE-PN
	3.2	Tyre size, front			7.00-12	7.00-12	7.00-12	7.00-12
	3.3	Tyre size, rear			6.00-9	6.00-9	6.00-9	6.00-9
	3.5	Wheels, number front/rear (x=driven wheels)			2x-4x/ 2	2x-4x/ 2	2x-4x/ 2	2x-4x/ 2
	3.6	Track width, front	b ₁₀	mm	960 / 1190	960 / 1190	960 / 1190	960 / 1190
	3.7	Track width, rear	b ₁₁	mm	965	965	965	965
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	deg	6/11	6/11	6/11	6/11
	4.2	Height, mast lowered	h ₁	mm	1995	1995	1995	1995
	4.3	Free lift	h ₂	mm	150	150	150	150
	4.4	Lift	h ₃	mm	2690	2960	2960	2960
		Lift height	h ₂₃	mm	3000	3000	3000	3000
	4.5	Height, mast extended	h ₄	mm	4250	4250	4250	4250
	4.7	Height of overhead guard (cab)	h ₆	mm	2110	2110	2110	2110
	4.8	Seat height	h ₇	mm	1050	1050	1050	1050
	4.12	Coupling height	h ₁₀	mm	315	315	315	315
	4.19	Overall length	l ₁	mm	3575	3575	3640	3640
	4.20	Length to face of forks	l ₂	mm	2575	2575	2640	2640
	4.21	Overall width	b ₁	mm	1150	1150	1150	1150
	4.22	Fork dimensions	s/e/l	mm	40/100/1000	40/100/1000	40/100/1000	40/100/1000
	4.23	Fork carriage DIN 15 173, class/type A, B			II A	II A	II A	II A
	4.24	Fork-carriage width	b ₃	mm	1020	1020	1020	1020
	4.31	Ground clearance, with load, below mast	m ₁	mm	90	90	90	90
	4.32	Ground clearance, centre of wheelbase	m ₂	mm	135	135	135	135
	4.33	Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	3870	3870	3950	3950
	4.34	Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4070	4070	4150	4150
	4.35	Turning radius	W _a	mm	2200	2200	2280	2280
	4.36	Internal turning radius	b ₁₃	mm	745	745	745	745
Performance data	5.1	Travel speed, with/without load		km/h	19/19	19/19	19/19	19/19
	5.2	Lift speed, with/without load		m/s	0,60/0,64	0,56/0,60	0,60/0,64	0,56/0,60
	5.3	Lowering speed, with/without load		m/s	< 0,50	< 0,50	< 0,50	< 0,50
	5.6	Max. drawbar pull, with/without load		N	17500/7800	17500/7800	17500/9000	17500/9100
	5.7	Gradeability, with load ^{1) 2)}		%	24	24	20	20
	5.8	Max. gradeability, with/without load ²⁾		%	32/20	32/20	27/22	27/22
	5.10	Service brake			Hydraulic	Hydraulic	Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type			Toyota 4Y ECS	Toyota 1DZ-III	Toyota 4Y	Toyota 1DZ-III
	7.2	Engine power acc. to ISO 1585		kW	38	36	38	36
	7.3	Rated speed		1/min	2570	2500	2570	2500
	7.4	No. of cylinders/displacement		cm ³	4/2237	4/2486	4/2237	4/2486
	7.5a	Fuel consumption according to VDI 60		kg/h	3,0	—	3,4	—
	7.5b	Fuel consumption according to VDI 60		l/h	—	3,2	—	3,6
Others	8.2	Operating pressure for attachments		bar	147	147	147	147
	8.3	Oil volume for attachments		l/min	65-71	65-77	65-71	65-77
	8.4	Sound level at the driver's ear according to EN 12 053		dB(A)	—	—	—	—

¹⁾ At 1,5 km/h.

²⁾ Computed values.

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.

Please obtain the latest specifications before contracting products.

Mast dimensions and rated capacities

Model			V								FV					FSV							
06-8FG/D20F	Lift height	h_{23}	3000	3300	3500	3700	4000	4500	5000	5500	3000	3300	3500	3700	4000	4300	4700	5000	5500	6000	6500		
	Lift	h_3	2960	3260	3460	3660	3960	4460	4960	5460	2960	3260	3460	3660	3960	4260	4660	4960	5460	5960	6460		
	Height, mast lowered	h_1	1995	2145	2245	2405	2595	2845	3095	3345	1995	2145	2245	2405	2595	1995	2145	2245	2405	2595	2845		
	Height, mast extended ¹⁾	h_4	3700	4000	4200	4400	4700	5200	5700	6200	3625	3925	4125	4325	4625	4900	5300	5600	6100	6600	7100		
	Height, mast extended ²⁾	h_4	4250	4550	4750	4950	5250	5750	6250	6750	4240	4540	4740	4940	5240	5540	5940	6240	6740	7240	7740		
	Free lift, without load backrest	h_2	150	150	150	150	150	150	150	150	1400 [1220]	1550 [1370]	1650 [1470]	1810 [1630]	2000 [1820]	1425	1575	1675	1835	2025	2275		
	Free lift, with load backrest	h_2	150	150	150	150	150	150	150	150	785	935	1035	1195	1385	785	935	1035	1195	1385	1635		
06-8FG/D25F	Lift height	h_{23}	3000	3300	3500	3700	4000	4500	5000	5500	3000	3300	3500	3700	4000	4300	4700	5000	5500	6000	6500		
	Lift	h_3	2960	3260	3460	3660	3960	4460	4960	5460	2960	3260	3460	3660	3960	4260	4660	4960	5460	5960	6460		
	Height, mast lowered	h_1	1995	2145	2245	2405	2595	2845	3095	3345	1995	2145	2245	2405	2595	1995	2145	2245	2405	2595	2845		
	Height, mast extended ¹⁾	h_4	3700	4000	4200	4400	4700	5200	5700	6200	3625	3925	4125	4325	4625	4900	5300	5600	6100	6600	7100		
	Height, mast extended ²⁾	h_4	4250	4550	4750	4950	5250	5750	6250	6750	4240	4540	4740	4940	5240	5540	5940	6240	6740	7240	7740		
	Free lift, without load backrest	h_2	150	150	150	150	150	150	150	150	1400 [1220]	1550 [1370]	1650 [1470]	1810 [1630]	2000 [1820]	1425	1575	1675	1835	2025	2275		
	Free lift, with load backrest	h_2	150	150	150	150	150	150	150	150	785	935	1035	1195	1385	785	935	1035	1195	1385	1635		

1) Without load backrest.


2) With load backrest; Height of standard load backrest is 1220 mm.

Data in [] are for when "A4 piping" is selected.

Single tyre			V								FV					FSV						
06-8FG/ D20F	Tilt range, forward	deg	6	6	6	6	6	6	6	—	6	6	6	6	6	6	6	6	6	6	6	
	Tilt range, backward	deg	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	—	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	6	6	6	6	
	Load capacity, P tyres at 500 mm LC	kg	2000	2000	2000	2000	2000	1950	1850	—	2000	2000	2000	2000	2000	2000	1900	1850	1450	1200	850	650
	Load capacity, SE tyres at 500 mm LC	kg	2000	2000	2000	2000	2000	1950	1900	—	2000	2000	2000	2000	2000	2000	1900	1850	1600	1350	1000	750
06-8FG/ D25F	Tilt range, forward	deg	6	6	6	6	6	6	6	—	6	6	6	6	6	6	6	6	6	6	6	
	Tilt range, backward	deg	11(6)	11(6)	11(6)	11(6)	9	6	6	—	11(6)	11(6)	11(6)	11(6)	9	6	6	6	6	6	6	
	Load capacity, P tyres at 500 mm LC	kg	2500	2500	2500	2500	2500	2150	1700	—	2500	2500	2500	2500	2500	2300	2000	1500	1250	900	650	
	Load capacity, SE tyres at 500 mm LC	kg	2500	2500	2500	2500	2500	2300	1850	—	2500	2500	2500	2500	2500	2300	2000	1650	1400	1050	750	

Dual tyre			V								FV					FSV							
06-8FG/D20F	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11(6)	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	6	6	6	6	6	6
	Load capacity, P/SE tyres 500 mm LC	kg	2000	2000	2000	2000	2000	1950	1900	1800	2000	2000	2000	2000	2000	1950	1900	1850	1800	1600	1550		
06-8FG/D25F	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11(6)	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	11(6)	11(6)	11(6)	11(6)	11(6)	6	6	6	6	6	6	6	6
	Load capacity, P/SE tyres at 500 mm LC	kg	2500	2500	2500	2500	2500	2450	2400	2300	2500	2500	2500	2500	2500	2500	2450	2400	2050	1700	1550		

Data in () are for when "Cabin Series" is selected (minimum front windshield).

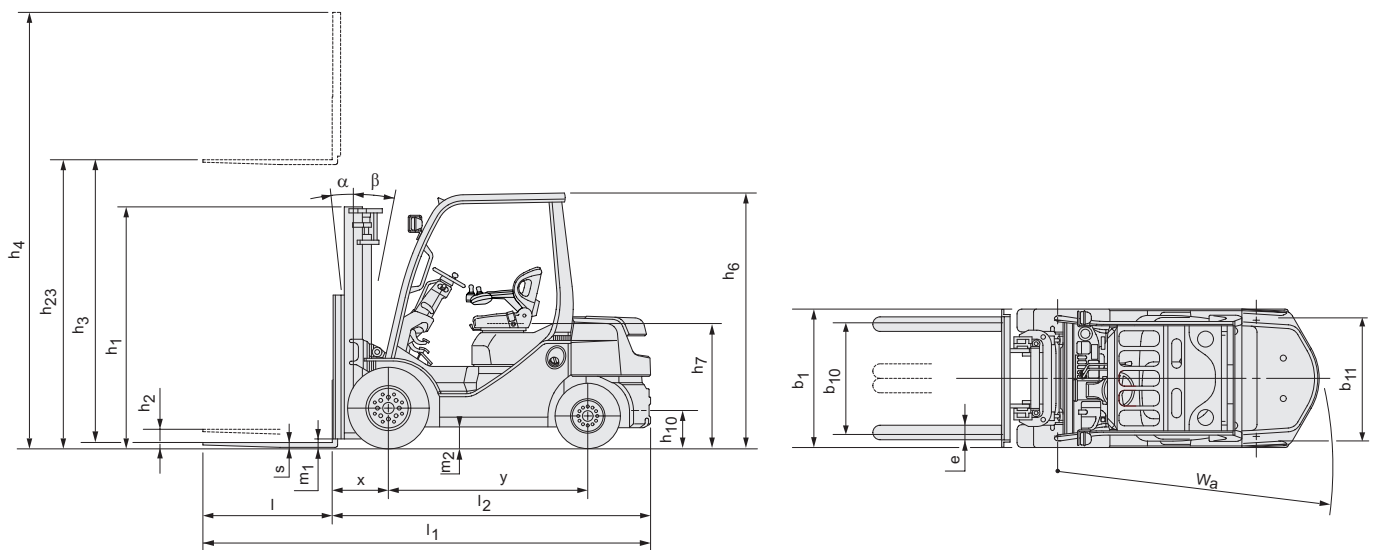

Engine powered forklift 3.0 ton

Truck specifications					06-8FG30F	06-8FD30F
Identification	1.1	Manufacturer			TOYOTA	TOYOTA
	1.2	Model			06-8FG30F	06-8FD30F
	1.3	Drive			LPG	Diesel
	1.4	Operator type			driver seated	driver seated
	1.5	Load capacity/rated load	Q	kg	3000	3000
	1.6	Load centre	c	mm	500	500
	1.8	Load distance, centre of drive axle to fork	x	mm	485	485
	1.9	Wheelbase	y	mm	1700	1700
Weight	2.1	Service weight		kg	4210	4250
	2.2	Axle load, with load, front/rear		kg	6230/980	6260/990
	2.3	Axle load, without load, front/rear		kg	1490/2720	1530/2720
Tyres	3.1	Tyre - pneumatic (P), pneumatic shaped cushion (SE), solid rubber (R)			SE-PN	SE-PN
	3.2	Tyre size, front			28x9-15/28x8-15	28x9-15/28x8-15
	3.3	Tyre size, rear			6.50-10	6.50-10
	3.5	Wheels, number front/rear (x=driven wheels)			2x-4x/2	2x-4x/2
	3.6	Track width, front	b ₁₀	mm	1010/1240	1010/1240
	3.7	Track width, rear	b ₁₁	mm	965	965
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	deg	6/11	6/11
	4.2	Height, mast lowered	h ₁	mm	2010	2010
	4.3	Free lift	h ₂	mm	135	135
	4.4	Lift	h ₃	mm	2955	2955
		Lift height	h ₂₃	mm	3000	3000
	4.5	Height, mast extended	h ₄	mm	4260	4260
	4.7	Height of overhead guard (cab)	h ₆	mm	2170	2170
	4.8	Seat height	h ₇	mm	1110	1110
	4.12	Coupling height	h ₁₀	mm	335	335
	4.19	Overall length	l ₁	mm	3780	3780
	4.20	Length to face of forks	l ₂	mm	2780	2780
	4.21	Overall width	b ₁	mm	1240	1240
	4.22	Fork dimensions	s/e/l	mm	45/100/1000	45/100/1000
	4.23	Fork carriage DIN 15 173, class/type A, B			IIIA	IIIA
	4.24	Fork-carriage width	b ₃	mm	1070	1070
	4.31	Ground clearance, with load, below mast	m ₁	mm	110	110
	4.32	Ground clearance, centre of wheelbase	m ₂	mm	180	180
	4.33	Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm	4115	4115
	4.34	Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm	4315	4315
	4.35	Turning radius	W _a	mm	2430	2430
	4.36	Internal turning radius	b ₁₃	mm	720	720
Performance data	5.1	Travel speed, with/without load		km/h	19/19	19/19
	5.2	Lift speed, with/without load		m/s	0,51/0,55	0,44/0,47
	5.3	Lowering speed, with/without load		m/s	<0,50	<0,50
	5.6	Max. drawbar pull, with/without load		N	17000/10300	17000/10400
	5.7	Gradeability, with load ^{1) 2)}		%	21/20	21/20
	5.8	Max. gradeability, with/without load ²⁾		%	32/20	32/20
	5.10	Service brake			Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type			Toyota 4Y ECS	Toyota 1DZ-III
	7.2	Engine power acc. to ISO 1585		kW	42	36
	7.3	Rated speed		1/min	2570	2500
	7.4	No. of cylinders/displacement		cm ³	4/2237	4/2486
	7.5a	Fuel consumption according to VDI 60		kg/h	3,7	—
	7.5b	Fuel consumption according to VDI 60		l/h	—	4,1
Others	8.2	Operating pressure for attachments		bar	147	147
	8.3	Oil volume for attachments		l/min	65-74	65-75
	8.4	Sound level at the driver's ear according to EN 12 053		dB(A)	—	—

¹⁾ At 1,5 km/h.

²⁾ Computed values.

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.

Please obtain the latest specifications before contracting products.

Mast dimensions and rated capacities

Model			V								FV					FSV					
06-8FG/D30F	Lift height	h_{23}	3000	3300	3500	3700	4000	4500	5000	5500	3000	3300	3500	3700	4000	4300	4700	5000	5500	6000	6500
	Lift	h_3	2955	3255	3455	3655	3955	4455	4955	5455	2955	3255	3455	3655	3955	4255	4655	4955	5455	5955	6455
	Height, mast lowered	h_1	2010	2160	2260	2420	2610	2860	3110	3360	2010	2160	2260	2420	2610	2160	2260	2420	2610	2860	3110
	Height, mast extended ¹⁾	h_4	3765	4065	4265	4465	4765	5265	5765	6265	3650	3950	4150	4350	4650	4950	5350	5650	6150	6650	7150
	Height, mast extended ²⁾	h_4	4260	4560	4760	4960	5260	5760	6260	6760	4250	4550	4750	4950	5250	5550	5950	6250	6750	7250	7750
	Free lift, without load backrest	h_2	135	135	135	135	135	135	135	135	1400	1550	1650	1810	2000	1550	1650	1810	2000	2250	2500
	Free lift, with load backrest	h_2	135	135	135	135	135	135	135	135	800	950	1050	1210	1400	950	1050	1210	1400	1650	1900


1) Without load backrest

2) With load backrest; Height of standard load backrest is 1220 mm.

Single tyre			V								FV					FSV					
06-8FG/D30F	Tilt range, forward	deg	6	6	6	6	6	6	6	—	6	6	6	6	6	6	6	6	6	6	—
	Tilt range, backward	deg	11	11	11	11	11	6	6	—	11	11	11	11	11	6	6	6	6	6	—
	Load capacity, P tyres at 500 mm LC	kg	3000	3000	3000	3000	3000	3000	2600	—	3000	3000	3000	3000	3000	3000	3000	2600	1900	1500	—
	Load capacity, SE tyres at 500 mm LC	kg	3000	3000	3000	3000	3000	3000	2750	—	3000	3000	3000	3000	3000	3000	3000	2750	2050	1650	—

Dual tyre			V								FV					FSV					
06-8FG/D30F	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	11	11	6	6	11	11	11	11	11	6	6	6	6	6	6
	Load capacity, P tyres at 500 mm LC	kg	3000	3000	3000	3000	3000	3000	3000	2550	3000	3000	3000	3000	3000	3000	3000	2950	2650	2050	1600

Data in () are for when "Cabin Series" is selected (minimum front windshield).

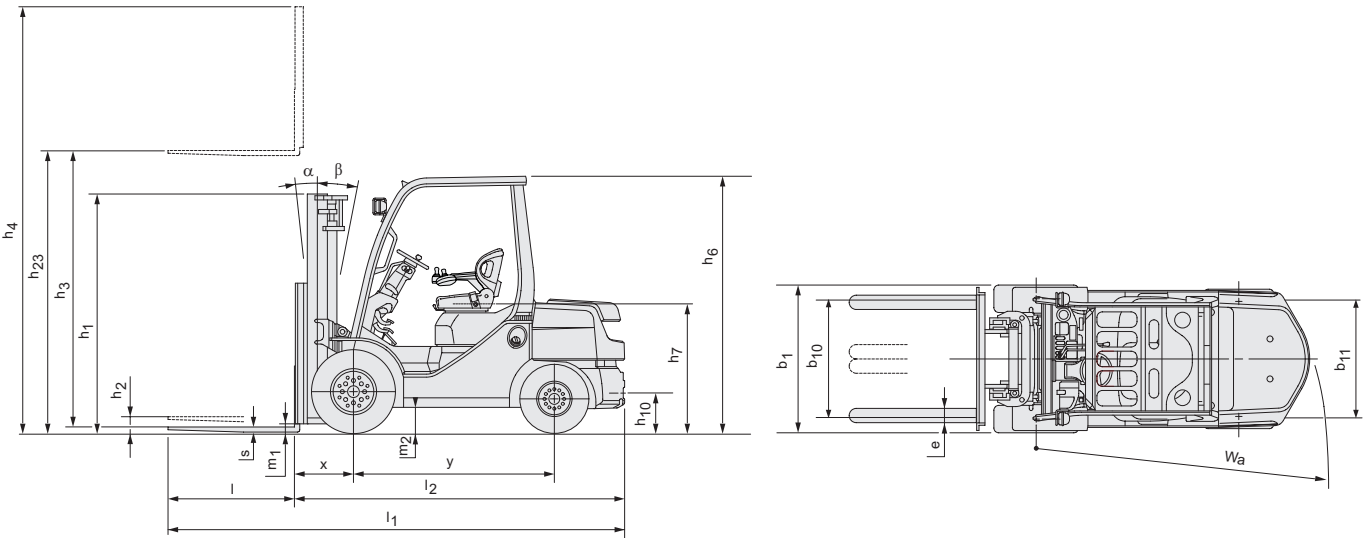

Engine powered forklift 3.5 ton

Truck specifications						06-8FGJ35F	06-8FDJ35F
Identification	1.1	Manufacturer				TOYOTA	TOYOTA
	1.2	Model				06-8FGJ35F	06-8FDJ35F
	1.3	Drive				LPG	Diesel
	1.4	Operator type				driver seated	driver seated
	1.5	Load capacity/rated load	Q	kg		3500	3500
	1.6	Load centre	c	mm		500	500
	1.8	Load distance, centre of drive axle to fork	x	mm		495	495
	1.9	Wheelbase	y	mm		1700	1700
Weight	2.1	Service weight		kg		4820	4860
	2.2	Axle load, with load, front/rear		kg		7250/1070	7260/1100
	2.3	Axle load, without load, front/rear		kg		1690/3130	1710/3150
Tyres	3.1	Tyre - pneumatic (P), pneumatic shaped cushion (SE), solid rubber (R)				SE-PN	SE-PN
	3.2	Tyre size, front				250-15/28x8-15	250-15/28x8-15
	3.3	Tyre size, rear				6.50-10	6.00-9
	3.5	Wheels, number front/rear (x=driven wheels)				2x-4x/2	2x-4x/2
	3.6	Track width, front	b ₁₀	mm		1060/1290	1060/1290
	3.7	Track width, rear	b ₁₁	mm		965	965
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	deg		6/11	6/11
	4.2	Height, mast lowered	h ₁	mm		2115	2115
	4.3	Free lift	h ₂	mm		135	135
	4.4	Lift	h ₃	mm		2955	2955
		Lift height	h ₂₃	mm		3000	3000
	4.5	Height, mast extended	h ₄	mm		4260	4260
	4.7	Height of overhead guard (cab)	h ₆	mm		2180	2180
	4.8	Seat height	h ₇	mm		1120	1120
	4.12	Coupling height	h ₁₀	mm		335	335
	4.19	Overall length	l ₁	mm		3850	3850
	4.20	Length to face of forks	l ₂	mm		2850	2850
	4.21	Overall width	b ₁	mm		1290	1290
	4.22	Fork dimensions	s/e/l	mm		40/125/1200	40/125/1200
	4.23	Fork carriage DIN 15 173, class/type A, B				IIIA	IIIA
	4.24	Fork-carriage width	b ₃	mm		1070	1070
	4.31	Ground clearance, with load, below mast	m ₁	mm		130	130
	4.32	Ground clearance, centre of wheelbase	m ₂	mm		190	190
	4.33	Aisle width for pallets 1000 x 1200 crossways	A _{st}	mm		4185	4185
	4.34	Aisle width for pallets 800 x 1200 lengthways	A _{st}	mm		4385	4385
	4.35	Turning radius	W _a	mm		2490	2490
	4.36	Internal turning radius	b ₁₃	mm		745	745
Performance data	5.1	Travel speed, with/without load		km/h		20/20	20/20
	5.2	Lift speed, with/without load		m/s		0,43/0,45	0,37/0,40
	5.3	Lowering speed, with/without load		m/s		<0,50	<0,50
	5.6	Max. drawbar pull, with/without load		N		16500/10500	16500/10600
	5.7	Gradeability, with load ^{1) 2)}		%		17/17	17/17
	5.8	Max. gradeability, with/without load ²⁾		%		27/22	27/22
	5.10	Service brake				Hydraulic	Hydraulic
Combustion engine	7.1	Engine manufacturer/type				Toyota 4Y ECS	Toyota 1DZ-III
	7.2	Engine power acc. to ISO 1585		kW		42	36
	7.3	Rated speed		1/min		2570	2500
	7.4	No. of cylinders/displacement		cm ³		4/2237	4/2486
	7.5a	Fuel consumption according to VDI 60		kg/h		4,0	—
	7.5b	Fuel consumption according to VDI 60		l/h		—	4,6
Others	8.2	Operating pressure for attachments		bar		147	147
	8.3	Oil volume for attachments		l/min		65-74	65-80
	8.4	Sound level at the driver's ear according to EN 12 053		dB(A)		—	—

¹⁾ At 1,5 km/h.

²⁾ Computed values.

Performance data and dimensions are nominal and subject to tolerances.

Specifications are subject to change without notice.

Please obtain the latest specifications before contracting products.

Mast dimensions and rated capacities

Model			V								FV					FSV					
06-8FG/DJ35F	Lift height	h_{23}	3000	3300	3500	3700	4000	4500	5000	5500	3000	3300	3500	3700	4000	4300	4700	5000	5500	6000	6500
	Lift	h_3	2955	3255	3455	3655	3955	4455	4955	5455	2955	3255	3455	3655	3955	4255	4655	4955	5455	5955	6455
	Height, mast lowered	h_1	2115	2295	2395	2495	2745	2995	3245	3545	2115	2295	2395	2495	2745	2230	2435	2625	2875	3125	3375
	Height, mast extended ¹⁾	h_4	3910	4210	4410	4610	4910	5410	5910	6410	3765	4065	4265	4465	4765	5065	5465	5765	6265	6765	7265
	Height, mast extended ²⁾	h_4	4260	4560	4760	4960	5260	5760	6260	6760	4250	4550	4750	4950	5250	5550	5950	6250	6750	7250	7750
	Free lift, without load backrest	h_2	135	135	135	135	135	135	135	135	1390	1570	1670	1770	2020	1500	1710	1900	2150	2400	2650
	Free lift, with load backrest	h_2	135	135	135	135	135	135	135	135	905	1085	1185	1285	1535	1015	1225	1415	1665	1915	2165


1) Without load backrest

2) With load backrest; Height of standard load backrest is 1220 mm.

Single tyre			V								FV					FSV					
06-8FG/DJ35F	Tilt range, forward	deg	6	6	6	6	6	6	6	—	6	6	6	6	6	6	6	6	6	—	—
	Tilt range, backward	deg	11	11	11	11	11	6	6	—	11	11	11	11	11	6	6	6	6	6	—
	Load capacity, P tyres at 500 mm LC	kg	3500	3500	3500	3500	3500	3500	3300	—	3500	3500	3500	3500	3500	3500	3400	3300	2700	2000	—
	Load capacity, SE tyres at 500 mm LC	kg	3500	3500	3500	3500	3500	3500	3400	—	3500	3500	3500	3500	3500	3500	3400	3300	2850	2150	—

Dual tyre			V								FV					FSV					
06-8FG/DJ35F	Tilt range, forward	deg	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
	Tilt range, backward	deg	11	11	11	11	11	11	6	6	11	11	11	11	11	6	6	6	6	6	6
	Load capacity, P tyres at 500 mm LC	kg	3500	3500	3500	3500	3500	3500	3400	2950	3500	3500	3500	3500	3500	3500	3400	3300	3200	2400	1650

Data in () are for when "Cabin Series" is selected (minimum front windshield).

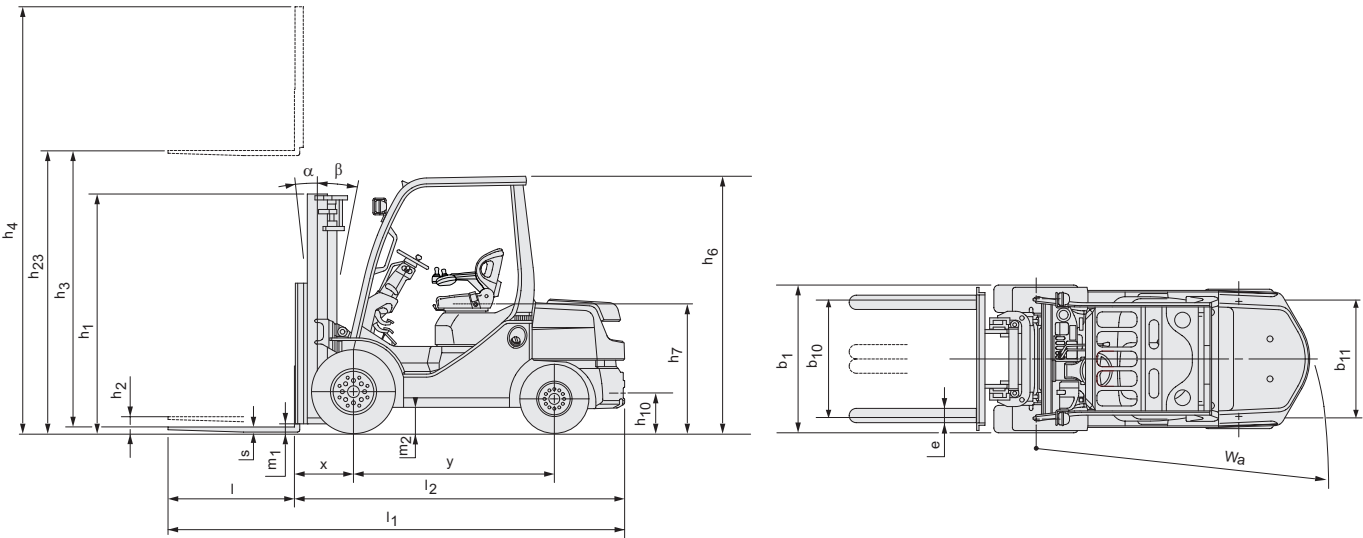

Standard equipments:

- Hydrostatic transmission
- Toyota SAS (System of Active Stability*)
- Toyota OPS (Operator Presence Sensing)
- Toyota ORS seat (Operator Restraint System)
- Wide visible mast (MFH: 3000 mm)
- Load backrest (Height: 1220 mm)
- Long forks (Length: 1000 mm)
- Long forkbar [Length: 1020 mm (8FG/D20F.25F); 1070 mm (8FG/D30F,8FG/DJ35F)]
- 3-way valve (A400)
- Dual brake system
- Pneumatic shaped cushion tyres
- Full hydraulic power steering
- 7" cyclone air cleaner with snorkel air intake
- Anti-restart ignition key switch
- Headlights
- Rear combination lights
- Combination meter including self diagnostic system
- Adjustable tilt steering column
- Polycarbonate roof

* = When dual tyres are selected, the Active Control Rear Stabilizer function of the SAS system of Active Stability (SAS) is not included.

