

VDE 2 E VDE SINGLE ENDED RING SPANNER



deep offset

- > GEDORE vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation



VDE 2 E 19



VDE 2 E 13

Ø	l mm	kg	Code	No.
8	170	0.061	6035890	VDE 2 E 8
9	170	0.074	6035970	VDE 2 E 9
10	170	0.097	6036000	VDE 2 E 10
11	180	0.093	6036190	VDE 2 E 11
12	190	0.147	6036270	VDE 2 E 12
13	190	0.130	6036350	VDE 2 E 13
14	210	0.151	6036430	VDE 2 E 14
15	215	0.155	6036510	VDE 2 E 15
17	220	0.199	6036780	VDE 2 E 17
19	240	0.244	6036860	VDE 2 E 19
22	260	0.319	6036940	VDE 2 E 22
24	280	0.446	6037080	VDE 2 E 24
27	295	0.506	6037160	VDE 2 E 27
30	310	0.592	6037240	VDE 2 E 30
32	330	0.683	6037320	VDE 2 E 32

VDE 894 VDE SINGLE OPEN ENDED SPANNER



- > GEDORE vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > Jaw set at 15°



VDE 894 12



VDE 894 22

Ø mm	l mm	kg	Code	No.
9	105	0.030	6572040	VDE 894 9
10	105	0.034	6572120	VDE 894 10
11	115	0.044	6572200	VDE 894 11
12	125	0.052	6572390	VDE 894 12
13	135	0.067	6572470	VDE 894 13
14	145	0.081	6572550	VDE 894 14
15	150	0.093	6572630	VDE 894 15
16	155	0.108	6572710	VDE 894 16
17	160	0.117	6572980	VDE 894 17
19	175	0.161	6573010	VDE 894 19
22	200	0.210	6573280	VDE 894 22
24	220	0.268	6573360	VDE 894 24
27	245	0.396	6573440	VDE 894 27
30	265	0.486	6573520	VDE 894 30
32	280	0.558	6574920	VDE 894 32

V 60 CP ADJUSTABLE WRENCH



open end, 1000 V

- > Chrome-plated
- > Dip-insulated
- > Individually tested, insulation up to 1000 V



Size"	mm	kg	Code	No.
6	20	0.170	2179040	V 60 CP 6
8	25	0.330	2179059	V 60 CP 8
10	30	0.520	2179067	V 60 CP 10
12	36	0.880	2179075	V 60 CP 12

VDE 2133 VDE SOCKET WRENCH



with 3C handle

- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Head depth 25 mm, blade length 125 mm
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900



Ø	l mm	l mm	Head Ø	Ø	kg	Code	No.
3	125	225	9	8,9	0.109	1747045	VDE 2133 3
4	125	225	10	8,9	0.111	1747053	VDE 2133 4
5	125	225	11	8,9	0.112	1747061	VDE 2133 5
6	125	225	12	8,9	0.114	1747088	VDE 2133 6
7	125	235	14	9,9	0.152	1747096	VDE 2133 7
8	125	235	15	9,9	0.154	1747118	VDE 2133 8
9	125	235	16	9,9	0.154	1747126	VDE 2133 9
10	125	235	17	9,9	0.161	1747134	VDE 2133 10
11	125	245	19	10,9	0.193	1747142	VDE 2133 11
12	125	245	20	10,9	0.196	1747150	VDE 2133 12
13	125	245	21	10,9	0.199	1747169	VDE 2133 13
14	125	245	22	10,9	0.198	1747177	VDE 2133 14
17	125	245	26	10,9	0.222	1747185	VDE 2133 17

VDE 4507 VDE TORQUE WRENCH 1/2"



5-50 N·m / 4-37 lbf·ft

- > Controlled screw tightening in the most common range of 5 - 50 N·m / 4 - 37 lbf·ft
- > Automatic short-path actuation with tactile impulse and audible signal
- > Dual scale with a scale graduation of 5 N·m and 5 lbf·ft
- > Fine toothed ratchet with square drive as per DIN 3120 - A 12.5, ISO 1174
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation




"	mm	mm	kg	Code	No.
1/2	12.5	370	1.251	6681920	VDE 4507-4

VDE 30 VDE SOCKET 3/8"



- > Hexagon socket wrench, hand-operated
- > With square drive according to DIN 3120 - C 10, ISO 1174
- > GEDORE vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > 16 - 18 mm insulation overhang



Ø	d ₁	d ₂	L	Code	No.
6	13.7	23	44	2946386	VDE 30 6
8	16.1	23	44	2946394	VDE 30 8
9		23	44	2946408	VDE 30 9
10	18.7	23	44	2946416	VDE 30 10
11	20.0	23	44	2946424	VDE 30 11
12	21.2	23	44	2946432	VDE 30 12
13	22.5	23	44	2946440	VDE 30 13
14	23.7	23	45	2946459	VDE 30 14
15	25.0	23	46	2946467	VDE 30 15
16	26.2	23	46	2946475	VDE 30 16
17	27.5	23	46	2946483	VDE 30 17
18	28.7	23	46	2946491	VDE 30 18
19	30.0	23	46	2946505	VDE 30 19
20	31.2	23	47	2946513	VDE 30 20
22	33.7	23	48	2946521	VDE 30 22

VDE INX 30 VDE SCREWDRIVER BIT SOCKET 3/8"



for multi-point screws XZN

- > With pressed-in pin
- > With square drive according to DIN 3120 - C 12.5, ISO 1174
- > Bit in GEDORE vanadium special steel, manganese-phosphated
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation



Code	No.
M8 2946564	VDE INX 30 8
M10 2946572	VDE INX 30 10
M12 2946580	VDE INX 30 12

VDE 3093 U VDE REVERSIBLE RATCHET 3/8"



with push-button release

- > Robust, with smooth action
- > Sockets held absolutely securely by push-button lock with ball in the square drive
- > Direction changed by 2 push-buttons, marked R and L, on the shaft
- > Return angle 8.2 degrees
- > Square drive acc. to DIN 3120 - A 10, ISO 1174, chrome-vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900



VDE 3090 VDE EXTENSION 3/8"



- > For hand-operated sockets with square drive as per DIN 3120, ISO 1174
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > 16 - 18 mm insulation overhang



"	mm	Code	No.
3/8	10	2946548	VDE 3090-3
3/8	10	2946556	VDE 3090-6

"	mm	mm	kg	Code	No.
3/8	10	185	0.215	2946599	VDE 3093 U



VDE 19 VDE SOCKET 1/2"




- > Hexagon socket wrench, hand-operated
- > With square drive according to DIN 3120 - C 12.5, ISO 1174
- > GEDORE vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > 16 - 18 mm insulation overhang
- > Sizes 27, 30 and 32: diameter d_1 is not standardised



VDE 19 13

VDE 19 19




Ø	d_1	d_2	L		Code	No.
10	19.5	27	54.0	0.070	6122510	VDE 19 10
11	20.7	27	54.0	0.067	6122780	VDE 19 11
12	22.0	27	54.0	0.070	6122860	VDE 19 12
13	23.2	27	54.0	0.069	6122940	VDE 19 13
14	24.5	27	54.0	0.073	6123080	VDE 19 14
15	25.7	27	55.5	0.088	6123160	VDE 19 15
16	27.0	27	55.5	0.086	1439294	VDE 19 16
17	28.2	27	55.5	0.084	6123240	VDE 19 17
19	30.7	27	56.0	0.092	6123320	VDE 19 19
22	34.5	27	57.5	0.121	6123400	VDE 19 22
24	37.0	27	57.5	0.146	6123590	VDE 19 24
27	40.7	27	57.5	0.174	6123670	VDE 19 27
30	44.5	27	59.0	0.212	6123750	VDE 19 30
32	47.0	27	60.5	0.250	6123830	VDE 19 32

VDE 1988 - VDE 1989 T VDE T-HANDLE



for 1/2" VDE tools

- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > VDE 1988 with screw locking, not suited for use with VDE IN 19
- > VDE 1989 T with pull locking

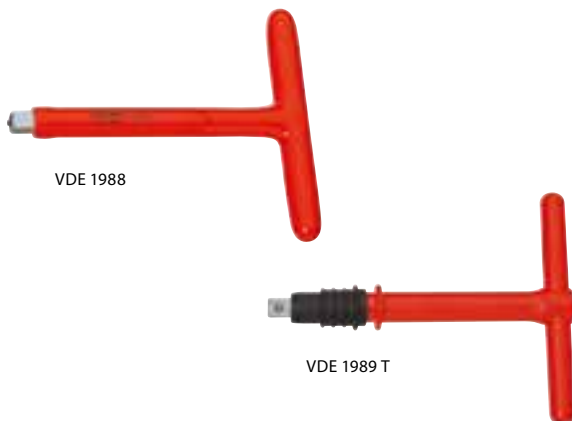

VDE 1988

VDE 1989 T

■ "	■	↳ mm ↳		Code	No.
1/2	12.5	200	0.455	6124210	VDE 1988
1/2	12.5	200	0.355	6124720	VDE 1989 T

VDE IN 19 VDE SCREWDRIVER BIT SOCKET 1/2"



for in-hex screws

- > With pressed-in pin
- > With square drive according to DIN 3120 - C 12.5, ISO 1174, with ball groove
- > Tip GEDORE vanadium special steel
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > Sockets can only be combined with VDE 1989 T, VDE 1991, VDE 1993 U and VDE 4507



VDE IN 19 5

VDE IN 19 8

●	↳ mm ↳	∅		Code	No.
5	106	27	0.083	6124480	VDE IN 19 5
6	106	27	0.095	6124560	VDE IN 19 6
8	106	27	0.109	6124640	VDE IN 19 8

VDE 1990 VDE EXTENSION 1/2"



- > For hand-operated sockets with square drive as per DIN 3120, ISO 1174
- > With lock screw for holding the socket wrenches
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation
- > Not suited for use with VDE IN 19
- > 16 - 18 mm insulation overhang



VDE 1990-5

VDE 1990-10

■ "	■	↳ mm ↳		Code	No.
1/2	12.5	125	0.213	6124050	VDE 1990-5
1/2	12.5	250	0.411	6124130	VDE 1990-10

VDE 1991 VDE EXTENSION 1/2"



- > With hollow shaft, especially suitable for screwdriver bit sockets VDE IN 19
- > Max. torque 370 N-m
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, two-ply Check-Tool insulation



■ "	■	↳ mm ↳		Code	No.
1/2	12.5	125	0.204	1507516	VDE 1991

VDE 1993 U

VDE REVERSIBLE RATCHET

1/2"



with push-button release

- > Robust, with smooth action
- > Sockets held absolutely securely by push-button lock with ball in the square drive
- > Direction changed by 2 push-buttons, marked R and L, on the shaft
- > Return angle 10 degrees
- > Square drive acc. to DIN 3120 - A 12.5, ISO 1174, chrome-vanadium steel 31CrV3
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900



"	mm	mm	kg	Code	No.
1/2	12.5	270	0.546	6123910	VDE 1993 U


V 42

VDE HEXAGON ALLEN KEY

for in-hex screws

1000 V

- > Acc. to DIN ISO 2936
- > Particularly suitable for cable branch clamping rings
- > Oil-hardened
- > GEDORE vanadium special steel
- > Individually tested, insulation up to 1000 V



mm	L ₁	L ₂	kg	Code	No.
3	130	23.5	0.020	2324849	V 42 3
4	120	40.0	0.025	2324857	V 42 4
5	140	48.0	0.045	2324865	V 42 5
6	140	48.0	0.060	2324873	V 42 6
8	150	51.0	0.110	2324881	V 42 8
10	220	51.0	0.230	2324903	V 42 10
12	260	61.5	0.350	2324911	V 42 12

V 42 T

VDE HEXAGON ALLEN KEY

WITH T-HANDLE

1000 V

for in-hex screws

- > Individually tested, insulation up to 1000 V
- > With Check-Tool insulation
- > GEDORE chrome-vanadium steel 59CrV4



mm	mm	X	kg	Code	No.
4	160	X	0.145	2661225	V 42 T 4
5	160	X	0.250	2661233	V 42 T 5
6	160	X	0.250	2661241	V 42 T 6
8	160	X	0.260	2661268	V 42 T 8
10	200	-	0.390	2661276	V 42 T 10
11	200	-	0.400	2661284	V 42 T 11
12	200	-	0.420	2661292	V 42 T 12

VDE 2170

VDE SCREWDRIVER

for slotted head screws

1000 V

- > Individually tested, VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, fully insulated blade
- > Tip to DIN ISO 2380-1 form B
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



mm	mm	mm	mm	kg	Code	No.
2.5	0.4	75	160	0.038	1612220	VDE 2170 2,5
3.0	0.5	100	185	0.042	1612239	VDE 2170 3
3.5	0.6	100	185	0.055	1612247	VDE 2170 3,5
4.0	0.8	100	185	0.058	1612255	VDE 2170 4
5.5	1.0	125	225	0.095	1612271	VDE 2170 5,5
6.5	1.2	150	260	0.134	1612298	VDE 2170 6,5
8.0	1.2	175	295	0.158	1612301	VDE 2170 8
10.0	1.6	200	320	0.208	1612336	VDE 2170 10

