

Impact & Ratchet Wrenches




Impact Wrenches

An impact wrench delivers a series of rotary blows to a fastener, producing torque. The advantage of impact wrenches is the high power-to-weight ratio, fast rundown, and limited torque reaction to the operator.


Ratchet Wrenches

For fastening applications in tight and difficult to access areas, CP offers you a wide range of ratchet wrenches with various square drive sizes up to 90 ft-lbs (122Nm).


Choose the type of Impact Wrench clutch




Pin clutch:
Excellent on hard joints with a good power/weight ratio.




Single dog clutch:
For soft and hard joints. High power/weight ratio.



Twin Hammer:
All around clutch with a high ultimate torque and high power/weight ratio.



Rocking dog clutch:
Good on very soft joints providing high speed rundown.









Two Jaw clutch:
Good on soft or hard joints with high ultimate torques.



Under optimal conditions of the air line network and its connections, tightening and loosening should take place within 5 seconds for increased durability of your tool. If this is not the case, a selection of a higher-performance product is recommended.

Choose the retainer you need

A wide selection of retainers provides versatility for every type of application - all with power, speed and comfort. Finally, your toughest jobs have met their match.

-  Pin Retainer for infrequent socket change
-  Hole for pin o-ring type retention
-  Friction Ring for rapid socket change
-  Dual (Hole + Friction) for versatility
-  Quick Change for screwdriver bits or torsion bars
-  Integral Spline with integral push button retainer

Choose Handle Type



Pistol (P)



D Handle Inside Trigger (D I T)



Butterfly (BF)

Impact Wrenches

Impact Screwdrivers

CP2036



LIGHTWEIGHT TOOL

FEATURES

- Straight impact screwdriver with quick change chuck
- Reversible
- Lever start
- Built in power regulator
- Ergonomic with suspension bail

BENEFITS

- Quick torque adjustment
- Improved productivity
- Ideal for multiple applications

CP2037



COMPACT & HIGH TORQUE

FEATURES

- Straight impact screwdriver with quick change chuck
- Reversible
- Lever start
- Built in power regulator
- Ergonomic with suspension bail

BENEFITS

- Durability
- Improved productivity
- Ideal for multiple applications

CP2041



HIGH SPEED & HIGH TORQUE

FEATURES

- Pistol impact screwdriver with quick change chuck
- Reversible
- High torque and high speed
- Ergonomic with suspension bail

BENEFITS

- Operator comfort
- One hand operation reverse valve
- Durability & productivity

CP2042



COMPACT & HIGH TORQUE

FEATURES

- Pistol impact screwdriver with quick change chuck
- Reversible & more versatility
- High torque and low speed
- Ergonomic with suspension bail

BENEFITS

- Operator comfort
- One hand operation reverse valve
- Durability and productivity

See accessories on page 21



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	TORQUE RANGE				AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
				MIN.		MAX.		cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
		in.	rpm	ft.lb	Nm	ft.lb	Nm									
CP2036	615 192 2036	1/4 Hex	10,000	2.5	3.4	12	16	3.2	1.5	13	6.1	8.1	207	1.7	0.78	1/4"
CP2037	615 192 2037	1/4 Hex	10,000	13.3	18.0	21	28	3.2	1.5	13	6.1	8.1	207	1.8	0.82	1/4"
CP2041	615 192 2041	1/4 Hex	15,000	5.9	8.0	31	42	6.8	3.2	27	12.7	5.9	151	2.3	1.04	1/4"
CP2042	615 192 2042	1/4 Hex	5,600	4.4	6.0	30	41	6.8	3.2	27	12.7	5.9	151	2.3	1.04	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1/4" & 3/8"

CP719



COMPACT & FAST

FEATURES

- 1/4" Heavy duty impact wrench
- Pin oil bath clutch
- Fast with 37 ft-lbs (47Nm) of torque at 7,000 rpm
- One handed push button forward and reverse power regulator

CP719QC

Same features as CP719 with 1/4" hex chuck



BENEFITS

- Compact and lightweight (gets into tight spots)
- Ideal for small engine repair, small fasteners, and body shop work

CP721



DURABILITY & PERFORMANCE

FEATURES

- 3/8" Heavy duty impact wrench
- Rocking dog clutch in oil bath
- Built in power regulator
- Ergonomic handle

CP9523

Same features as CP721 with Pin socket retainer



BENEFITS

- Clutch delivers smooth operation and extreme durability
- Comfort and compact for easy access
- Great tool for soft joints
- Improved productivity and quality

CP7722



COMPACT & DURABLE

FEATURES

- 3/8" Heavy duty impact wrench
- Butterfly forward / reverse throttle
- Rocking dog clutch in oil bath
- 4 positive power settings
- Easy manoeuvring with 360° air inlet swivel

BENEFITS

- Comfort and maneuverability
- Ideal for bench work, carburetors, ignitions, body panels, transmissions, oil pans, and small engine repair

CP9522-B



NEW

SLIM & FAST

FEATURES

- 3/8" Heavy duty impact wrench
- Butterfly forward / reverse throttle
- Rocking dog clutch in oil bath
- 4 positive power settings
- Adjustable and 360° air inlet swivel

BENEFITS

- Comfort with slim shape and maneuverability
- Compact with adjustable air inlet for easy access

See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP719	T022750	1/4	7,000	5-20	7-27	34	47	2.0	0.9	8	3.8	4.5	114	2.5	1.1	1/4"
CP719QC	T025367	1/4 Hex	7,000	5-20	7-27	34	47	2.0	0.9	8	3.8	4.5	114	2.5	1.1	1/4"
CP721	T021963	3/8	11,000	5-50	7-68	75	102	2.5	1.2	10	4.7	5.8	146	2.6	1.2	1/4"
CP9523	615 190 9523	3/8	11,000	5-50	7-68	75	102	2.5	1.2	10	4.7	5.8	146	2.6	1.2	1/4"
CP7722	894 107 7220	3/8	9,500	5-65	7-88	90	122	3.2	1.5	13	6.0	6.3	160	2.1	1.0	1/4"
CP9522-B	615 190 2522	3/8	9,500	5-50	7-70	90	122	3.2	1.5	13	6.0	6.7	170	2.2	0.9	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 3/8" & 1/2"

CP724H



HIGH TORQUE IN SMALL PACKAGE

FEATURES

- 3/8" Heavy duty impact wrench
- DYNA-PACT oil bath clutch
- One handed push button forward / reverse with 4 positive power settings
- Full power in reverse

CP726H

Same features as CP724H with 1/2" square drive

CP9525

Same features as CP724H with Pin socket retainer



BENEFITS

- Clutch delivers smooth operation and extreme durability
- Power and economy for general repair, transmission work, exhaust systems, and body shops

CP8242



COMPOSITE BODY & LOW WEIGHT

FEATURES

- 1/2" Compact impact wrench
- Twin Hammer clutch
- Composite body and magnesium clutch housing
- Forward position: 3 power settings

CP8222

Same features as CP8242 with 3/8" square drive

BENEFITS

- Low noise and lightweight tool
- Great durability and power
- Operator comfort

CP7735



POWERFUL & LIGHTWEIGHT

FEATURES

- 3/8" Heavy duty impact wrench
- Twin Hammer clutch
- Ultimate torque: 300 ft-lbs (407Nm)
- Composite body and magnesium clutch housing
- Ergonomic handle with superior balance

BENEFITS

- Powerful and durable tool to improve productivity
- Operator comfort over long periods of use with less fatigue

CP7735Q

Part No. 894 107 7351
Same features as CP7735 with quiet technology

CP7735H



POWERFUL & LIGHTWEIGHT

FEATURES

- 1/2" Heavy duty impact wrench
- Twin Hammer clutch
- Ultimate torque: 300 ft-lbs (407Nm)
- Composite body and magnesium clutch housing
- Ergonomic handle with superior balance

BENEFITS

- Powerful and durable tool to improve productivity
- Operator comfort over long periods of use with less fatigue

CP7735HQ

Part No. 894 107 7353
Same features as CP7735H with quiet technology

See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP724H	894 100 7240	3/8	8,500	40-170	54-230	200	271	3.0	1.4	12	5.7	6.0	152	3.1	1.40	1/4"
CP726H	T025114	1/2	8,500	40-170	54-230	200	271	3.0	1.4	12	5.7	6.0	152	3.1	1.40	1/4"
CP9525	615 190 9525	1/2	8,500	20-160	27-217	200	271	3.0	1.4	12	5.7	6.0	152	3.0	1.36	1/4"
CP8242	615 190 8242	1/2	11,500	184-295	250-400	479	650	6.0	3.7	32	15.0	7.0	177	2.6	1.17	1/4"
CP8222	615 190 8222	3/8	11,500	184-295	250-400	331	450	6.0	3.7	32	15.0	7.0	177	2.5	1.13	1/4"
CP7735	894 107 7350	3/8	10,000	22-221	30-300	300	407	3.7	1.8	15	7.0	5.7	145	2.6	1.17	1/4"
CP7735H	894 107 7352	1/2	10,000	22-221	30-300	300	407	3.7	1.8	15	7.0	5.7	145	2.6	1.17	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1/2"

CP7620



NEW

STANDARD IMPACT

FEATURES

- 1/2" Standard duty impact wrench
- Pin oil bath clutch
- One handed push button forward / reverse with 4 positive power settings
- Full power in reverse
- Through handle air exhaust and 360° air inlet swivel

CP7620 Kits

See details on page 21



BENEFITS

- Power and speed
- Operator comfort
- A powerful yet economical tool ideal for general repair, transmission work, exhaust systems, and body shops

CP9540-B



PERFORMANCE & DURABILITY

FEATURES

- 1/2" Super duty impact wrench
- Pin oil bath clutch
- Compact and ergonomic with rubber handle
- Full power in reverse
- One handed push button forward / reverse with 4 positive power settings
- Through handle air exhaust and 360° air inlet swivel

CP9540-B Kits

See details on page 21



BENEFITS

- Clutch delivers smooth operation and extreme durability
- Operator comfort
- Versatile and powerful tool ideal for all general repairs and maintenance applications

CP7733



DURABILITY & ECONOMY

FEATURES

- 1/2" Heavy duty impact wrench
- CP's patented *SpringHammer* clutch
- Low air consumption and high torque
- Ergonomic trigger and handle



BENEFITS

- Operator comfort with new ergonomic grip and progressive trigger
- Best power / weight / speed ratio in its class
- Ideal for general automotive service, tire and body shops, farm, and light truck work

CP7733-2

Same features as CP7733 with 2" (51mm) extended anvil



CP7733



CP734H, see page 7

MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP7620	894 107 6201	1/2	8,400	25-310	34-420	425	576	3.7	1.8	15	7.1	7.5	191	5.1	2.3	1/4"
CP9540-B	615 190 2540	1/2	8,400	25-310	34-420	425	576	3.7	1.8	15	7.1	7.5	191	5.1	2.3	1/4"
CP7733	894 107 7330	1/2	6,900	25-400	35-542	550	746	4.7	2.2	19	9.0	7.1	180	5.6	2.5	1/4"
CP7733-2	894 107 7332	1/2	6,900	25-400	35-542	550	746	4.7	2.2	19	9.0	9.1	231	5.9	2.7	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

See accessories on pages 21 & 26



Impact Wrenches

Impact 1/2"

CP749



SUPER DUTY AND RELIABLE

FEATURES

- 1/2" Super duty impact wrench
- CP's patented *SpringHammer* oil bath clutch
- One handed push button forward / reverse with 4 positive power settings
- Full power in reverse
- Compact design with comfortable contoured handle



CP749 Kits

See details on page 21



BENEFITS

- Operator comfort and productivity
- Withstands rough use with high speed and power
- Ideal for general automotive service, tire and body shops, farm, light truck work, and industrial maintenance

CP8252



COMPOSITE BODY & LOW WEIGHT

FEATURES

- 1/2" Heavy duty impact wrench
- Twin Hammer clutch
- Composite body and magnesium clutch housing
- Forward position: 3 power settings

BENEFITS

- Low noise and lightweight tool
- Great durability and power
- Operator comfort

CP8253

Same features as CP8252 with 2" (51mm) extended anvil



CP749-2



SUPER DUTY AND RELIABLE

FEATURES

- 1/2" Super duty impact wrench
- CP's patented *SpringHammer* oil bath clutch
- One handed push button forward /reverse with 4 positive power settings
- Full power in reverse
- Compact design with comfortable contoured handle
- Plus 2" (51mm) extended anvil



CP749-2 Kit

See details on page 21



BENEFITS

- Operator comfort and productivity
- Withstands rough use with high speed and power
- Ideal for general automotive service, tire and body shops, farm, and light truck work



CP8252

See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP749	T024587	1/2	6,400	50-450	68-610	625	827	5.5	2.6	22	10.4	7.0	178	5.5	2.5	1/4"
CP749-2	T024673	1/2	6,400	50-450	68-610	625	827	5.5	2.6	22	10.4	9.0	229	5.8	2.6	1/4"
CP8252	615 190 8252	1/2	9,000	220-590	300-800	775	1050	7.2	3.4	28.8	13.6	7.9	200	4.4	2.0	1/4"
CP8253	615 190 8253	1/2	9,000	220-590	300-800	775	1050	7.2	3.4	28.8	13.6	10.3	262	4.7	2.1	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1/2"

CP7749



NEW

BALANCE & POWER

FEATURES

- 1/2" Heavy duty impact wrench
- Twin hammer clutch
- Full power in reverse up to 725 ft-lbs (983Nm)
- Composite handle and magnesium clutch housing
- S2S technology and 3 positive power settings
- Lightweight and low noise level tool

BENEFITS

- Maximize operator comfort with an extremely well balanced tool
- Most convenient and unique reverse technology in the market



S2S Technology is the market's most convenient one handed impact wrench design. The operator can change between forward & reverse with one hand in any position. There is less stress/fatigue on operator's wrist and arm

when changing between forward & reverse. It decreases the weight of the tool and improves the overall balance of the tool.

CP7749-2



NEW

BALANCE & POWER

FEATURES

- 1/2" Heavy duty impact wrench
- 2" (51mm) extended anvil
- Twin hammer clutch
- Full power in reverse up to 725 ft-lbs (983Nm)
- Composite handle and magnesium clutch housing
- S2S technology and 3 positive power settings
- Lightweight and low noise level tool

BENEFITS

- Maximize operator comfort with an extremely well balanced tool
- Most convenient and unique reverse technology in the market

CP7750



MOST POWERFUL 1/2" IMPACT

FEATURES

- 1/2" Extreme duty impact wrench
- Composite handle and aluminum clutch housing
- Industry best 1500bpm, removes even the most stubborn fastener
- 4 position power regulator with 2 speeds in forward and 2 in reverse

BENEFITS

- Control even at high torque levels
- Best in industry to loosen bolts quick and easy

CP7750-2

Same features as CP7750 with 2" (51mm) extended anvil



See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP7749	894 107 7490	1/2	9,000	75-580	102-786	725	983	4.7	2.2	19	9.0	7.3	186	4.4	1.98	1/4"
CP7749-2	894 107 7492	1/2	9,000	75-580	102-786	725	983	4.7	2.2	19	9.0	9.3	236	4.7	2.1	1/4"
CP7750	894 107 7520	1/2	6,400	50-550	68-746	800	1,085	8.0	3.8	32	15.1	7.6	193	5.1	2.3	1/4"
CP7750-2	894 107 7522	1/2	6,400	50-550	68-746	800	1,085	8.0	3.8	32	15.1	9.6	244	5.6	2.6	1/4"

All models: Hose int. 3/8" (10mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 3/4"

CP7763



COMPACT & HIGH TORQUE

FEATURES

- 3/4" Super duty impact wrench
- Twin hammer clutch
- High Power: 1200 ft-lbs (1,627Nm)
- Compact size at only 11.6 lbs (5.3kg)
- Combined power regulator with forward/reverse

CP7763-6

Same features as CP7763 with 6" (152mm) extended anvil



BENEFITS

- Operator comfort due to reduced noise level and compact size
- Powerful motor and durable clutch

CP9560



POWER & DURABILITY

FEATURES

- 3/4" Heavy duty impact wrench
- Pin clutch oil bath
- One handed push button forward / reverse with 4 positive power settings
- Full power in reverse
- 360° air inlet swivel

BENEFITS

- Clutch delivers smooth operation and extreme durability
- Operator comfort
- Ideal tool for general repair and maintenance



CP772H, see page 7

CP8072




HIGH TORQUE & LOW WEIGHT

FEATURES

- 3/4" Heavy duty impact wrench
- Twin hammer clutch
- Magnesium housing
- Forward position: 3 power settings
- Cushion grip handle

CP8073

Same features as CP8072 with 6" (152mm) extended anvil



BENEFITS

- Reduced noise and lightweight tool
- Great durability and power
- Operator comfort

CP8272



COMPOSITE BODY & LOW WEIGHT

FEATURES

- 3/4" Heavy duty impact wrench
- Twin hammer clutch
- Composite body and magnesium clutch housing
- Forward position: 3 power settings
- High power: 1,217 ft-lbs (1,650Nm)

CP8275

Same features as CP8272 with 6" (152mm) extended anvil



BENEFITS

- Reduced noise and lightweight tool
- Great durability and power
- Operator comfort

See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED		WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
			in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	
CP7763	894 107 7630	3/4	6,300	100-950	136-1,288	1,200	1,627	7.5	3.6	30	14.2	8.8	224	11.6	5.3	3/8"	
CP7763-6	894 107 7636	3/4	6,300	100-950	136-1,288	1,200	1,627	7.5	3.6	30	14.2	15.0	381	13.9	6.3	3/8"	
CP9560	615 190 9560	3/4	4,200	150-700	203-949	1,000	1,356	6.0	2.8	24	11.3	9.6	245	10.5	4.8	3/8"	
CP8072	615 190 8072	3/4	6,500	100-960	135-1,300	1,217	1,650	9.0	4.3	36	17.0	9.1	230	10.8	4.9	3/8"	
CP8073	615 190 8073	3/4	6,500	100-960	135-1,300	1,217	1,650	9.0	4.3	36	17.0	15.2	387	13.0	5.9	3/8"	
CP8272	615 190 8272	3/4	6,500	100-960	135-1,300	1,217	1,650	12.0	5.7	48	23.0	9.1	230	7.3	3.3	3/8"	
CP8275	615 190 8275	3/4	6,500	100-960	135-1,300	1,217	1,650	12.0	5.7	48	23.0	15.0	382	8.6	3.9	3/8"	

All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1"

CP7773




COMPACT 1" TOOL

FEATURES

- 1" Heavy duty impact wrench
- Twin hammer clutch
- High Power: 1,200 ft-lbs (1,627Nm)
- One handed use
- Combined power regulator with forward/reverse

CP7773-6

Same features as CP7773 with 6" (152mm) extended anvil



BENEFITS

- Operator comfort due to reduced noise level and compact size
- Powerful motor and durable clutch
- Ideal for spring work, pinion nut, tractor pad removal, truck tire work, and major engine tear downs

CP8084



LOW WEIGHT

FEATURES

- 1" Heavy duty impact wrench
- Twin hammer clutch
- Magnesium body
- Forward position: 3 power settings
- Slim style nose

CP8085

Same features as CP8084 with 6" (152mm) extended anvil



BENEFITS

- Reduced noise and lightweight tool
- Great durability and power
- Operator comfort

CP893



DURABILITY & PERFORMANCE

FEATURES

- 1" Heavy duty impact wrench
- Pin clutch in oil bath
- High performance motor
- One handed push button forward / reverse with 4 positive power settings
- Full power in reverse
- Adjustable side handle

BENEFITS

- Maximize power output
- Operator comfort and durability
- Ideal tool for maintenance and heavy vehicle general repair

CP894



DURABILITY & SMOOTH OPERATION

FEATURES

- 1" Heavy duty impact wrench
- Pin clutch in oil bath
- One handed push button forward / reverse with 3 positive power settings
- Full power in reverse
- Adjustable side handle

BENEFITS

- Clutch delivers smooth operation and extended durability
- Operator comfort
- Ideal tool for maintenance and heavy vehicle general repair

MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE (FW)		MAX TORQUE (REV)		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP7773	894 107 7730	1	6,300	100-950	136-1,288	1,200	1,627	7.5	3.6	30	14.2	8.8	224	12.1	5.5	3/8"
CP7773-6	894 107 7736	1	6,300	100-950	136-1,288	1,200	1,627	7.5	3.6	30	14.2	15.0	381	14.0	6.3	3/8"
CP8084	615 190 8084	1	6,500	100-960	135-1,300	1,217	1,650	9.0	4.2	36	17.0	9.1	230	11.1	5.1	3/8"
CP8085	615 190 8085	1	6,500	100-960	135-1,300	1,217	1,650	9.0	4.2	36	17.0	15.2	387	13.0	5.9	3/8"
CP893	T024272	1	4,400	200-710	271-963	1,400	1,898	10.2	4.8	41	19.3	11.5	292	23.0	10.4	3/8"
CP894	T024743	1	4,100	300-1,200	407-1,627	1,700	2,305	11.2	5.3	45	21.2	11.8	298	25.0	11.3	1/2"

All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1"

CP7774




SUPER DURABILITY

FEATURES

- 1" Super duty impact wrench
- Rocking dog clutch
- High torque: 1,750 ft-lbs (2,373Nm)
- 3 position power settings in forward and reverse
- Ergonomic handle and lightweight tool

CP7774-6

Same features as CP7774 with a 6" (152mm) extended anvil



BENEFITS

- Extreme durability for everyday work
- Great weight / power ratio
- Operator comfort

CP796



EXTREME DUTY & POWER

FEATURES

- 1" Extreme duty impact wrench
- 2 jaw clutch
- Very high torque: 2,000 ft-lbs (2,712Nm)
- Compact housing design
- Adjustable side handle

BENEFITS

- One of the best power to weight ratio in the 1" class
- Powerful motor and extremely durable clutch
- Operator comfort
- Industrial quality and dependability

CP897




CP'S LIGHTEST 1" STRAIGHT IMPACT

FEATURES

- 1" Heavy duty impact wrench
- Rocking dog clutch
- Lightweight tool: 16.3 lbs (7.4kg)
- High performance motor with minimal air consumption
- Teasing throttle for easy bolt starting
- Convenient reverse valve

CP897-6

Same features as CP897 with a 6" (152mm) extended anvil



BENEFITS

- CP's lightest 1" straight impact wrench
- Operator comfort
- Perfect for high volume truck tire shops

CP7640-6



DURABILITY & PERFORMANCE

FEATURES

- 1" Heavy duty impact wrench
- Rocking dog clutch with oil bath
- High torque and durability
- Teasing throttle
- Inside trigger
- Plus 6" (152mm) extended anvil

BENEFITS

- Clutch delivers smooth operation and durability
- Ideal for high volume work on maintenance, trucks, buses, and heavy equipment



CP797-6, see page 7

See accessories on pages 21 & 26



MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AVERAGE AIR CONS.		AIR CONS. @ LOAD	OVERALL LENGTH		NET WEIGHT		AIR INLET	
				(FW)	(REV)	(FW)	(REV)	cfm	l/s		in.	mm	lb	kg		
		in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb	kg	NPTF
CP7774	894 107 7740	1	5,000	100-1,300	136-1,763	1,750	2,373	8.2	3.9	33	15.6	10.5	267	22.2	10.1	1/2"
CP7774-6	894 107 7746	1	5,000	100-1,100	136-1,491	1,550	2,102	8.2	3.9	33	15.6	17.0	432	25.5	11.6	1/2"
CP796	T019799	1	4,100	300-1,400	407-1,898	2,000	2,712	13.0	6.1	52	24.5	9.5	241	20.0	9.1	1/2"
CP897	T025379	1	3,800	150-800	203-1,085	1,300	1,763	6.5	3.1	26	12.3	13.8	349	16.3	7.4	1/2"
CP897-6	T025368	1	3,800	150-800	203-1,085	1,300	1,763	6.5	3.1	26	12.3	19.8	502	19.0	8.6	1/2"
CP7640-6	894 100 7976	1	4,200	150-900	203-1,220	1,400	1,898	3.7	1.8	15	7.1	22.3	565	29.8	13.5	1/2"

All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Impact 1"

CP7778



EFFICIENCY & POWER

FEATURES


- 1" Heavy duty impact wrench
- Rocking dog clutch
- High efficiency 6 vane motor
- 3 position power settings with directional control
- Angled down exhaust

BENEFITS

- High efficiency motor, yet economical
- Ideal tool for tire work, general repair and maintenance



CP7778-6

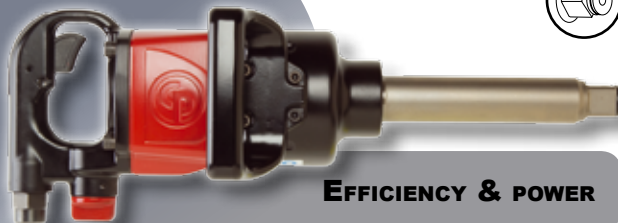

EFFICIENCY & POWER

FEATURES

- 1" Heavy duty impact wrench
- Rocking dog clutch
- High efficiency 6 vane motor
- 3 position power settings with directional control
- Angled down exhaust
- Plus 6" (152mm) extended anvil

BENEFITS

- High efficiency motor, yet economical
- Ideal tool for tire work, general repair and maintenance



CP7778SP-6

Part No. 894 107 7781
Same features as CP7778-6 with #5 Spline drive



CP7775-6



POWERFUL & ERGONOMIC

FEATURES

- 1" Heavy duty impact wrench
- Rocking dog clutch
- Lightweight tool: 25.4 lbs (11.5 kg)
- High torque: 1,550 ft-lb (2,102 Nm)
- 4 position power settings in forward and reverse
- Ergonomically designed handles and trigger
- Plus 6" (152mm) extended anvil

BENEFITS

- Less operator fatigue due to great power/weight ratio and ergonomic design
- Ideal for high volume work on trucks, buses, and heavy equipment



CP7775

Same features as CP7775-6 with non-extended anvil

CP7775SP-6

Part No. 894 107 7751
Same feature as CP7775-6 with #5 spline



CP5000



MOST POWERFUL

FEATURES

- 1" Super duty impact wrench
- New Design = New performances
- High torque: 2,500 ft-lbs (3,390Nm)
- Rocking dog clutch
- 4 position power settings and teasing throttle for ease of use
- Convenient reverse valve for ease of use
- Plus 7" (178mm) extended anvil

BENEFITS

- Our strongest and most powerful 1" impact
- Operator productivity
- Ideal for high volume tire work on trucks, buses, and heavy equipment

See accessories on pages 21 & 26




MODEL	PART NUMBER	OUTPUT DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AVERAGE AIR CONS.		AIR CONS. @ LOAD		OVERALL LENGTH		NET WEIGHT		AIR INLET
				(REV)		(FW)										
				in.	rpm	ft.lb	Nm	ft.lb	Nm	cfm	l/s	cfm	l/s	in.	mm	lb
CP7778	894 107 7780	1	5,000	100-1,100	136-1,491	1,450	1,966	8.7	4.1	35	16.5	13.4	355	22.2	10.1	1/2"
CP7778-6	894 107 7786	1	5,000	100-1,100	136-1,491	1,450	1,966	8.7	4.1	35	16.5	20.2	513	25.4	11.5	1/2"
CP7775-6	894 107 7756	1	5,300	100-1,200	136-1,627	1,550	2,102	8.7	4.1	35	16.5	20.2	513	25.4	11.5	1/2"
CP7775	894 107 7750	1	5,300	100-1,200	136-1,627	1,550	2,102	8.7	4.1	35	16.5	13.4	355	22.2	10.1	1/2"
CP5000	T024351	1	3,700	185-2,065	240-2,800	2,500	3,390	13.0	6.2	52	25.0	22.5	572	30.5	13.8	1/2"

All models: Hose int. 1/2" (13mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool.

Impact Wrenches

Spares & Accessories



TUNE-UP KITS & REPAIR KITS

MODEL	TUNE-UP KIT	REPAIR KIT
CP2036	894 020 840 5	
CP2037	894 020 840 1	
CP2041	894 020 840 2	
CP2042	894 020 840 6	
CP719/719QC	CA157285	CA157286
CP721	CA118880	
CP9523	894 016 3083	
CP7722	894 016 4482	
CP9522-B	C146210	205 052 8803
CP724H	CA155218	CA155310
CP726H	CA155309	CA155311
CP9525	CA157814	CA127524
CP8242	205 052 1383	205 052 4713
CP8222	205 052 1373	205 052 1393
CP7735/7735H/Quiet	894 016 7479	894 016 7480
CP7620	894 016 8267	
CP9540-B	CA157792	CA157793
CP7740	894 016 2408	8940162410
CP7740-2	894 016 2408	8940163047
CP7733	894 015 8860	894 015 8861
CP7733-2	894 015 8860	894 015 8862
CP749	894 015 8635	894 015 8636
CP749-2	CA148616	CA155967
CP7749/7749-2	894 016 7481	894 016 7482
CP8252/8253	205 052 1413	205 052 1423
CP7750	894 015 8371	894 015 8372
CP7750-2	894 015 8371	894 015 8373
CP7763	894 016 2925	894 016 2927
CP7763-6	894 016 2925	894 016 2928
CP9560	CA157799	CA157800
CP8072/73	205 052 0513	205 052 0523
CP8272/75	205 052 4703	205 052 4713
CP7773	894 016 2926	894 016 2929
CP7773-6	894 016 2926	894 016 2930
CP8084	205 052 0513	205 052 0533
CP8085	205 052 0513	205 052 2323
CP893/893-6	CA146649	CA149160
CP894	CA149855	
CP7774/7774-6	894 016 2693	
CP796	CA126992	
CP897/897-6	CA157909	
CP7778/7778-6/SP-6	894 016 2816	
CP7775/7775-6/SP-6	894 016 2206	
CP5000	CA148687	

MUFFLERS

TOOL	PART NUMBER
CP7749	894 016 8294
CP9540-B	894 016 8295



GLOVES

DESCRIPTION	PART NUMBER
Impact glove Size: Large	894 015 8618
Impact glove Size: X-Large	894 015 8619



IMPACT KITS



CP7620 Kit

CP7620 Kit Metric

Part No. 8941176201 / 8941276201

Kits include:

- (1) 1/2" Impact wrench CP7620
- (1) Bottle of air tool oil
- (5) Imperial Sockets - 1/2", 5/8", 3/4", 7/8" & 5/16" AF or
- (5) Metric Sockets - 14, 16, 17, 19, 22mm



CP9540-B Kit (CP9550-B)

CP9540-B Kit Metric (CP9552-B)

Part No. 6151902550 / 6151902552

Kits include:

- (1) 1/2" Impact wrench CP9540-B
- (5) Imperial Sockets - 1/2", 5/8", 3/4", 7/8" & 5/16" AF or
- (5) Metric Sockets - 14, 16, 17, 19 & 22mm AF

CP749 Kit

Part No. T025193

Kit includes:

- (1) 1/2" Impact wrench CP749
- (5) Imperial Sockets - 1/2", 5/8", 3/4", 7/8" & 5/16" AF
- (1) Bottle of air tool oil

CP749 Kit Metric

Part No. T025194

Kit includes:

- (1) 1/2" Impact wrench CP749
- (5) Metric Sockets - 14, 16, 17, 19 & 22mm AF
- (1) Bottle of air tool oil

CP749-2 Kit

Part No. T025195

Kit includes:

- (1) 1/2" Impact wrench CP749-2
- (2) Imperial Flip Sockets - 3/4", 13/16" & 19mm, 21mm
- (1) Bottle of air tool oil

PROTECTOR COVERS

TOOL	PART NUMBER
PVC tool cover	
CP724, CP726	CA146522
CP9540	CA129405
CP749, CP749-2	CA155537
CP7733 (All)	894 015 8949
CP7750 (All)	894 015 8793
CP7763 (All)	894 016 3076
CP7749 (All)	894 016 7487
CP7773	894 016 7498
CP7774 (All)	894 016 2785



MAGNETIC TOOL HOLDER

TOOL	PART NUMBER
CP9841	894 016 6664

