

# M u l t i j e t

*Patented 180° pivoting high pressure hose reel*

- Very stable road holding because of low point of gravity
- New modern design
- Extreme low noise level



High pressure  
jetting trailers





# M u l t i j e t

*The MultiJet is a high pressure jetting trailer, designed and built to the latest technology and suitable for unblocking and cleaning of drains and sewers up to 600 mm.*

The patented 180° pivoting high pressure hose reel gives optimal and ergonomic ease of operation. The hose reel swings out at the back of the machine at 180° direction and can be fixed in different working positions, without losing ease of operation. The hose can easily be rolled on and off in the right working direction in one-way streets. No matter how you work, the control box always comes with the hose reel.




The motor/pump compartment is fully closed and provided with bottom plate and fire braking isolation material. In combination with a special exhaust system, this leads to an extreme low noise level.

The MultiJet has on both sides of the frame a 400 litres / 88 gallons water tank, which are mutually connected. Because of the construction of the water tanks the movement of weight will be minimized during lapping of water in the tank. Therefore the point of gravity of the machine is extremely low and results in a very stable road holding with full or empty water tanks.



Because of the low unladen weight of the machine, up to 800 litres / 176 gallons can be transported and the design of the MultiJet results in a lower fuel consumption of the towing vehicle.

The MultiJet is available in various configurations and can be extended with many options e.g. Riomote® radio remote control, Riopulse® pulsator system, quick filling and suction ventury systems.

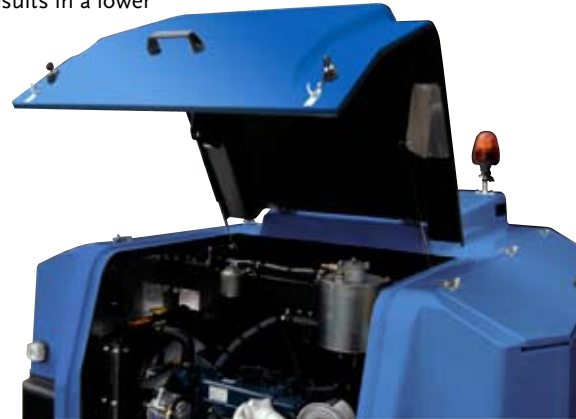

## Technical details

<b>Water tank</b>	500 (2 x 250) or 800 (2 x 400) litres / 110 (2 x 55) or 176 (2 x 88) gallons
<b>Drive</b>	Kubota water cooled diesel engine
<b>Pump</b>	Rioned/Speck high pressure pump P45 or P52 with water filter and pressure regulator
<b>Capacity</b>	150 bar / 60 lpm – 150 bar / 100 lpm – 160 bar / 75 lpm – 160 bar / 85 lpm 200 bar / 60 lpm – 200 bar / 72 lpm 2250 psi / 13 gpm – 2250 psi / 22 gpm – 2400 psi / 17 gpm – 2400 psi / 19 gpm 3000 psi / 13 gpm – 3000 psi / 16 gpm
<b>Outfit</b>	180° pivoting high pressure hose reel with hydraulic drive and 80 m high pressure hose NW 13 or NW 16 and collapsible hose guidance. Manual supply hose reel with 50 m supply hose NW 19. Control box with ignition keys and control lights, 2 large lockable tool boxes on both sides with a total capacity of 280 litres, 2 jet nozzles – open and blind, 1 jetting gun with 850 mm lance and flat spray nozzle.
<b>Weight</b>	As from 880 kg
<b>Dimensions</b>	3450 x 1800 x 1450 mm

## Rioned

**Rior B.V./Rioned**  
Postbus 5070  
5004 EB Tilburg  
The Netherlands

Tel. +31 (0)13 547 91 00  
Fax +31 (0)13 547 91 04

info@rioned.com  
www.rioned.com

**Rioned UK Ltd**  
23 James Carter Road  
Mildenhall, Suffolk, IP28 7DE  
United Kingdom

Tel. +44 (0)1638 713 800  
Fax +44 (0)1638 716 863

sales@rioned.co.uk  
www.rioned.co.uk